



Luksander Falconry Battery Instructions
For the LF-2, LF-3 Series

- 1) Begin with two 392 Eveready Silver Oxide Batteries and place them in the position shown:




- 2) Next, you'll want to "stack" the batteries, one on top of the other, making sure that the positive and negative ends are in the correct locations:




- 3) After the batteries have been stacked together, place a battery sleeve to fit over both batteries. This will keep them together appropriately.



- 4) Now the batteries are ready to be slid into the battery slot of the transmitter. Follow the picture shown:

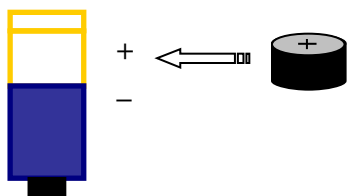

- 5) The final step is placing a battery holder on the outside of the brass component to hold the batteries in place. Now your transmitter is on and ready for use.

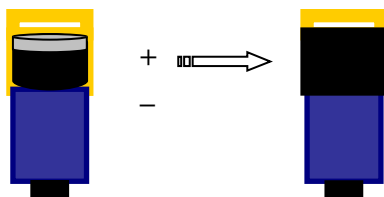

Warning: Improper placement of the batteries will result in a "blown out" transmitter, so be sure the positive and negatives are in the appropriate positions.

Antenna Replacement Instructions

For Bewit Mount:

1. O-Ring
2. Screw Type Antenna

For Wire Clip:

- A. White Bushing
- B. Wire Clip
- C. O-Ring
- D. Antenna
- E. Tube Assembly

